



NOTES

1. See Sheet 3 for details and notes.
2. Angle A = 75° Max., 40° Min.
3. Span "S" and height of opening and curb face at culvert (Section A-A) shall be noted on plans.
4. Concrete Class = 560-C-3250, 1" rock, 4" max. slump.

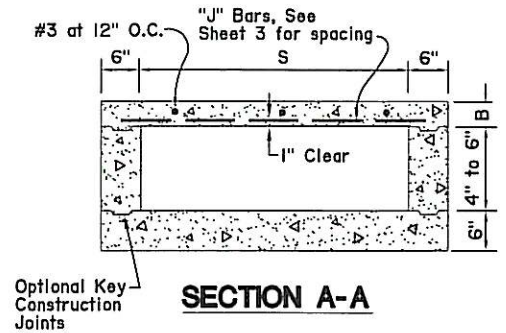


Notes for Special Design:
 1. Use steel from Table on Sheet 3.
 2. 20' Curb transition on either side required.


Manhole per Std. Dwg. 204
 or as approved by Director
 of Engineering.

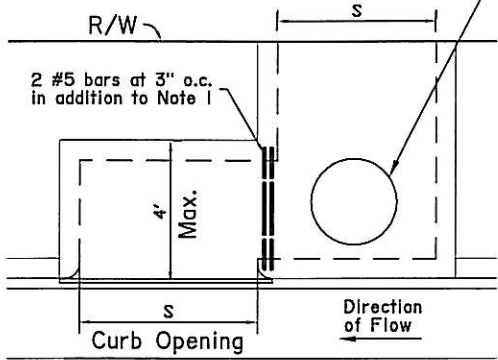


PLAN
SPECIAL DESIGN
OPTIONAL HIGH VELOCITY DIVERTER

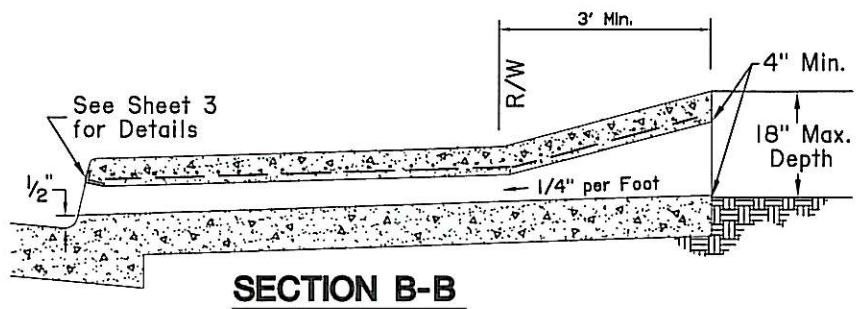

SECTION B-B

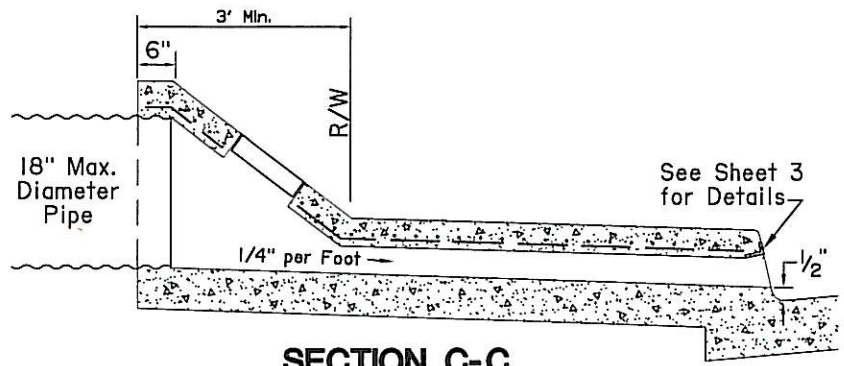

SECTION C-C

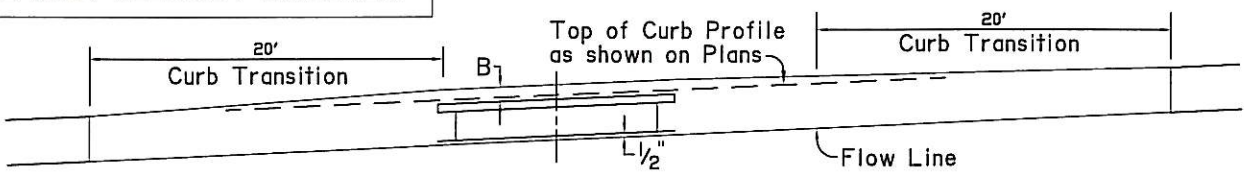

PROFILE

DRAWN PLS.
 DATE 8/1/95

CITY OF FULLERTON
ENGINEERING DEPARTMENT

REVISED
 DATE 4/28/09

STD. NO.
128
 1 of 3

PARKWAY CULVERT - TYPE "A"

APPROVED DKH
 DIRECTOR OF ENGINEERING

DATE 5-18-09